

VBELL 1 Arenti[®]

QUICK GUIDE

Trådløs Wi-Fi batteri video dørklokke



Kompatibel med Amazon Alexa og Google Assistant

Quick start guide

1. Indhold
2. Produktbeskrivelse
3. Installation

4. Konfiguration af enhed
5. Juridisk meddeelse

1. Indhold



Kamera x1



Strøm adapter x1



USB kabel X1



Klokke x1



Skruer x3



Skruetrækker x1



Advarselsskilt x1



3M klistermærke x2





Quick guide x1




Beslag x1*

*Beslaget kobles på kameraet.

2. Product description

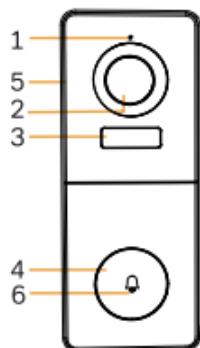

1. Mikrofon
2. Linse
3. PIR
4. Dørklokke knap
5. Højttaler
6. LED indikator
7. Micro SD slot
8. Reset knap
9. DC5V USB port
10. Tænd/Sluk

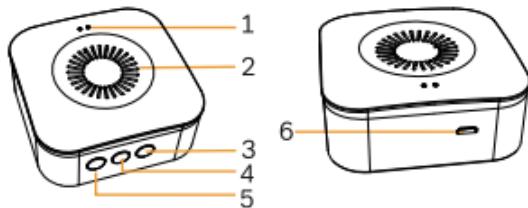

- 1.LED indikator
- 2.Højttaler
- 3.Ringtone
- 4.Volumen
- 5.Funktionsknap
- 6.Micro USB indgang

Note

For at nulstille kameraet; tryk og hold knappen nede i 5 sekunder.
Kameraet bipper når det er gennemført.

LED indikator på kamera:


Blinkende rødt lys (langsomm)	Afventer konfiguration
Blinkende rødt lys (hurtig)	Tilslutter til netværk
Fast blåt lys	Ikke tilsluttet netværk
Blinkende blåt lys	Kameraet er opsat korrekt

LED indikator på klokke:

Blinkende rødt lys	Vent på parring
Fast blåt lys	Parring korrekt

3. Installation

Installation med skruer

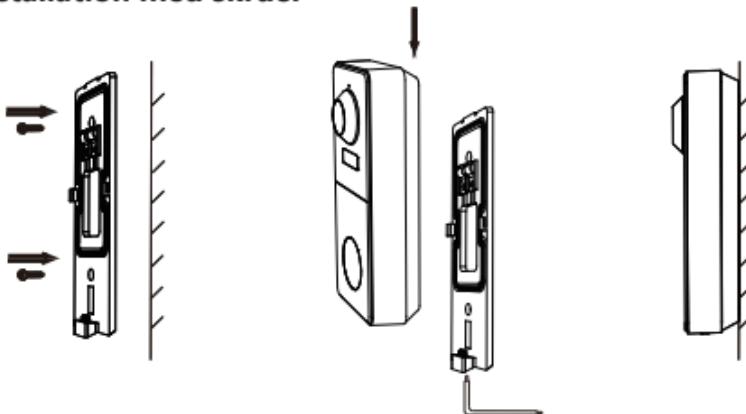

1. Opsæt beslaget på væggen med skruerne.
2. Sæt kameraet på beslaget og fikser det med skrutrækkeren.

Installation med 3M klistermærke



1. Fastgør beslaget til kameraet med skruen i bunden.
2. Påsæt den klæbende tape til beslaget.
3. Påsæt den anden halvdel af den klæbende tape på væggen.

4. Kamera konfiguration


Step 1 Tænd kameraet ved at tilslutte det strøm.

Step 2 Tilslut din telefon til Wi-Fi netværk.

Step 3 Download Arenti app'n fra App Store eller Google Play (afhængig af din telefon).

Step 4 Start Arenti App'en og opret en konto (én gang).

Step 5 Følg fremgangsmåden nedenfor og følg vejledningen på skærmen.

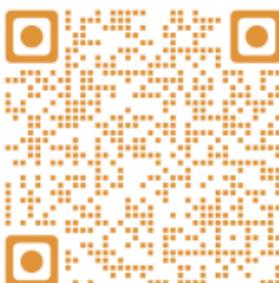

Note

-Hvis du har flere kameraer, så følg step 6 igen for at tilføje flere enheder.

-For at ændre Wi-Fi netværk, reset kameraet og følg step 6 for at tilføje kameraet igen.

Klokkeparring

1.Tryk kort  (ca. 2 sekunder), status indikator blinker langsomt rødt og klokken vil nu være i parringsmode




Blinker rødt under parring

2.Tryk på dørklokkeknappen for at parre, når klokvens statuslys slukker og melodien spiller automatisk, er parringen korrekt.

Beskrivelse:

1. Klokken kan tilsluttes op til maksimalt 8 dørklokker.
2. Når klokken er i parringsmode, tryk igen  (ca. 2 sekunder) klokken vil automatisk lukke parringsmode.
og melodien spiller automatisk, er parringen korrekt.
3. Efter korrekt tilføjelse af klokken, vil volumen automatisk blive justeret til maks. Når volumen er på minimum, kan du justere til max volumen ved at trykke på  .
- 4.Hvert tryk på  vil afspille den næste melodi med blinkende blåt lys

Blinker blåt når den ringer



Specifications

Sensor type	1/2.8" CMOS
Min. brightness	Color 0.1Lux@F2.0
	Black and white 0.01Lux@F2.0
Resolution	3 Mega pixels
Lens	3.2 mm F2.0
Shutter	1/15-1/10,000 per second
Infrared	High power LED with ICR
Infrared distance	5 meters
FOV	130°
Video compression	H.264
Bit rate	32Kbps - 2Mbps
Max resolution	2304 x 1296
Framerate	1-25 per second
Picture settings	Support HD/SD; support flip
Storage	SD card (Max 256GB)
Audio	Two-way audio
Protocols	HTTP, DHCP, DNS
WiFi standard	IEEE802.11b/g/n
Frequency	2.4 GHz - 2.4835 GHz
WiFi encryption	WPA-PSK/WPA2-PSK
Security	AES128
Working temperature	-20°C~50°C
Power	DC5V,1A
Consumption	4.5W MAX
Size(mm)	27.5x18x142
Battery	6700mAh
Standby consumption	200µA (average)
Work consumption	220mA (IR off)
Standby time	10 months
Working time	3 months (10 times wake up per day)
PIR Detection Range	7m (Max.)
PIR Detection Angle	100°

5. Juridisk meddeelse

Support

www.arenti.com

Symbols

==== Direct current (DC)



Don't throw batteries or out of order products with the household waste (garbage). The dangerous substances that they are likely to include may harm health or the environment. Make your retailer take back these products or use the selective collect of garbage proposed by your city.



Hereby, Arenti, declares that the radio equipment type 'VBell 1' is in compliance with the Directive 2014/53/EU

The full test of the EU declaration of conformity is available at the following Internet address:

www.arenti.com



For indoor use only



FCC Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

FCC Radiation Exposure Statement

This device complies with FCC radiation exposure limits set forth for an uncontrolled environment and it also complies with Part 15 of the FCC RF Rules. This equipment must be installed and operated in accordance with provided instructions and the antenna(s) used for this transmitter must be installed to provide a separation distance of at least 20 cm from all persons and must not be co-located or operating in conjunction with any other antenna or transmitter. End-users and installers must be provide with antenna installation instructions and consider removing the no-collocation statement.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Caution!

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

© 2022 Arenti. All rights reserved. All trade names are registered trademarks of respective companies Apple, the Apple logo, iPhone are trademarks of Apple Inc. registered in the U.S. and other countries. Google, the Google logo, Android are trademarks of Google Inc. App Store is a service mark of Apple Inc. Google Play is a service mark of Google Inc.